




Enjoy outdoor living - with balkoFLOOR®, the new generation of balcony and patio toppings. Advanced materials, highest quality and visually a real eye-catcher. You will love these high-quality, durable and easy-care flooring for outdoor areas.

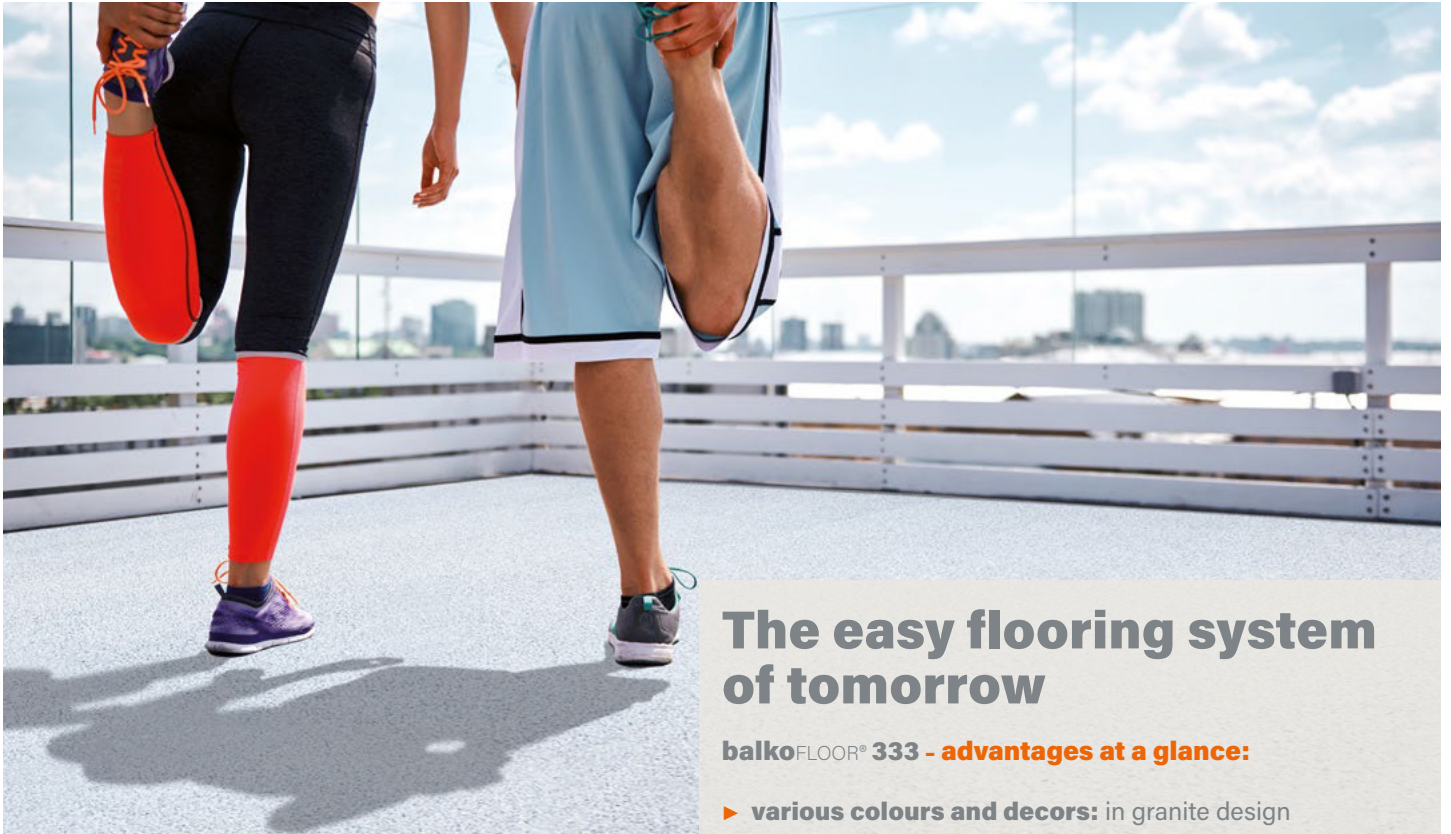

The balkoFLOOR® 333 aluminum balcony flooring panel has been tested by LGA (Landesgewerbeanstalt Bayern) as part of a type approval examination. The basis for this approval is the type approval S-A/180520 (extended by S-A/230430 until December 31, 2028). The assessment verified the structural stability of the product as a load-bearing construction component in accordance with the applicable technical building regulations. The type approval applies exclusively to the areas of application and load assumptions defined in the test report.

Details are available at: <https://www.balkofloor.de/pruefbericht>

The easy flooring system of tomorrow

balkoFLOOR® 333 - advantages at a glance:

- ▶ **various colours and decors:** in granite design
- ▶ **extremely durable:** high-strength and attractive coating, scratch-resistant surface
- ▶ **completely sealed and stable:** when laid, bears a surface load of 4.0 kN/m² (~400 kg/m²)
- ▶ **easy construction:** sound-damped click system, cuttable on site with a jigsaw or similar
- ▶ **extremely low weight:** easy handling, installable without a crane, no extra costs
- ▶ **tested system structure:** profiles can be used everywhere according to specifications
- ▶ **light, friendly underside:** white powder coating
- ▶ **weatherproof:** UV-resistant surfaces
- ▶ **largely maintenance-free:** easy to clean and durable
- ▶ **non-flammable:** Basic profile A1, coating B1 (flame retardant)
- ▶ **short delivery time:** Gstandard panels available within a few weeks
- ▶ **low temperature build up:** through integrated entilation
- ▶ **high span widths:** up to 1.76 m without additional supports or over 2 m possible on multiple spans
- ▶ **extensive accessories**

balcony flooring systems

Balcony flooring made easy

Thanks to the low weight of the panels, installation is very straightforward. The aluminium profiles are easy to handle and install by hand. Plus, they can be drilled, milled or cut using standard wood and aluminium tools.

For planners: balkoFLOOR® 333 aluminium panel typetested by the LGA.

Stable and sealed

Our sound-insulated click system with its uniform joint pattern means that the aluminum profiles are completely sealed and dimensionally stable. As a result, they protect against dripping water and require far less support structure than conventional flooring panels. Thanks to the structurally calculated multi-chamber system, a support span of up to 1.76 m is completely sufficient. The lower number of supports required means that the cost of the balcony frame are significantly lower.

Elegant, durable and versatile

The surface of the panels can be made in different colours and decors. The underside is white powder coated and therefore bright, friendly and easy to clean.

Aluminium is extremely durable – under normal circumstances it won't rot, rust, decay, or break up due to weather conditions.


balkoFLOOR® is suitable for all terraces, pergolas and loggias, as well as for all balconies such as prefabricated balconies made of steel, aluminum, wood or concrete. In addition, all kinds of renovation can be made very successfully.



Technically impeccable

balkoFLOOR® panels are manufactured according to the applicable DIN standards and therefore delivered with the CE mark. Thanks to the proven click system, the panels can be laid almost without joints. The additional built-in seal ensures impermeability on the one hand and a sound-deadened connection on the other.

balkoFLOOR® 333

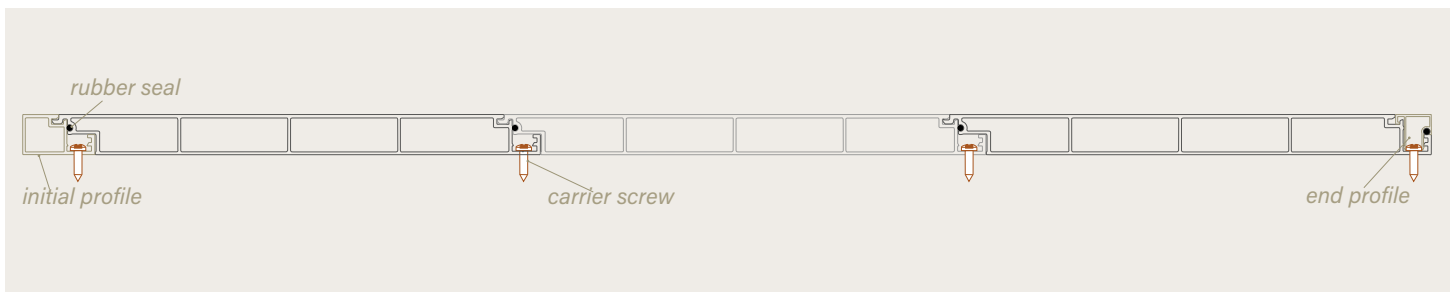

Technical modifications are reserved at any time. The customer shall be liable for all defects or failures that are not attributable to demonstrable defects in the profiles, in particular those arising from the structural calculations of the substructure and from professional installation. Any claims for damages exceeding the value of the defective profiles are excluded. Note: This is a legally oriented translation intended to reflect the original meaning. For use in contracts or terms and conditions, a legal review by a qualified professional is recommended.

balkoFLOOR® is a trademark of

